


## TACTIX 11MM

### 11MM KERNMANTLE STATIC ROPE

#### ZT11



The popular low stretch, high strength, kernmantle rope is ideal for industrial abseiling, general industry, rescue lifeline use, work positioning and restraint.

The high proportion of sheath to cover ratio provides improved abrasion protection and reduced sheath slippage. Manufactured with the highest standard with premium quality yarns, the most modern of machinery and a stringent quality control process.

Tactix has an excellent compatibility with all leading brands of hardware and available in 3 sizes, per metre of the roll, in cut lengths, or rolls.

**SIZE:** 11mm

**RATING:** 3,465kg

#### CERTIFICATION:

EN1891:1998, AS 4142.3-1993


EN 1891:1998 Personal protective equipment for the prevention of falls from a height. Low stretch kernmantle ropes

AS 4142.3-1993 Fibre ropes - Man-made fibre rope for static life rescue lines



MODEL	SIZE	WEIGHT (G)	DIMENSIONS	MATERIAL	RATING (KG)
ZT11	per metre		11mm diameter	Polyester	3,465kg

PRODUCT MAKE	CODE	LENGTH PER UNIT MASS	BREAKING FORCE	KNOT BREAKING FORCE	IMPACT STRENGTH INDEX	ELONGATION @ 80 KG / 375 KG	ELONGATION @ BREAK	KNOT-ABILITY RATIO	SHEATH SLIPPAGE	COLOURFAST TO WATER / RUBBING/LIGHT	STATIC STRENGTH WITH FIGURE OF 8 KNOT (15KN / 3 MINS)	CORE /COMPLETE ROPE RATIO	COVER/COMPLETE ROPE RATIO	COVER/COMPLETE ROPE RATIO	STATIC STRENGTH WITH SEWN EYES
TACTIX 11mm Kernmantle Static Rope	ZT11	13.4 m/kg	3,465kg	1,550kg	min 4	2.4% / 9.8%	20%	1.0	2.0 mm	4-5/4-5/6-7	pass (broke at 19.4kN)	AS4142 EN1891	55.6%	44.4%	29.9 kN

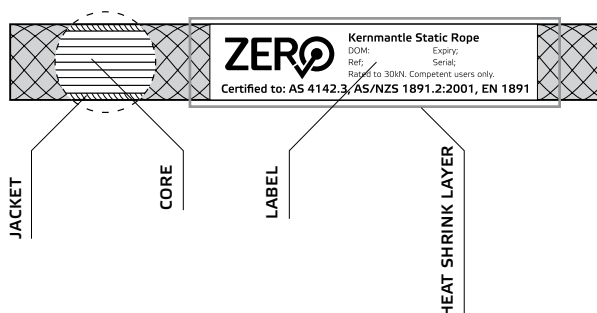

#### ZERO HEIGHT SAFETY LIMITED

**AUSTRALASIA**  
10 Holt Place, Harewood,  
Christchurch 8053, New Zealand  
sales.nz@zeroheightsafety.com

**EUROPE & UK**  
Badenerstrasse 122,  
5466 Kaiserstuhl, Switzerland  
sales.eu@zeroheightsafety.com

zeroheightsafety.com

